

## Features

- The large flow diameter and the use of rubber seals greatly reduce the cleanliness requirement for the working medium, exhibiting characteristics such as rapid opening and closing and high reliability.
- Compact design to for limited installing space
- The product can be flexibly assembled and disassembled according to usage requirements.
- Overall IP65 protection grade
- Small volume, good sealing, easy maintenance, compact structure, low energy consumption, and responsive.
- Shared pneumatic circuit; the 2VM series valves share a main pneumatic circuit, making installation convenient and saving on connecting materials.



## Product Information

| 2VM-030-08-D2-F_F   |                                    |       |       |
|---------------------|------------------------------------|-------|-------|
| Body Material       | Aluminium Alloy                    |       |       |
| Sealing Material    | NBR                                |       |       |
| Working Temperature | 50℃                                |       |       |
| Operating Pressure  | 0-6 Bar (maybe variable by models) |       |       |
| Voltage range       | AC220V                             | DC24V | DC12V |
| Power Rate          | 8VA                                | 7W    |       |
| Operating Speed     | Less than 3 cycles / second        |       |       |
| Installation        | Bottom thread M4 hole installation |       |       |
| Port Size           | 1/8"                               |       | 1/4"  |

## Coil Specifications

|                       |                |       |       |
|-----------------------|----------------|-------|-------|
| Protection Level      | IP65           |       |       |
| Voltage variable      | ±10%           |       |       |
| Coil Max. Temperature | 120℃           |       |       |
| Standard Current      | 192 mA (DC24V) |       |       |
| Voltage range         | AC220V         | DC24V | DC12V |
| Standard Capacitor    | 479 mAH        |       |       |
| Standard Resistance   | 125 Ω          |       |       |




Direct Acting Manifold  
**Modular Design Solenoid Manifold**  
 Brass Bodies  
 1/8" to 1/4" BSPP

**2/2**  
 SERIES  
**2VM**

YAW-S

### Ordering Code

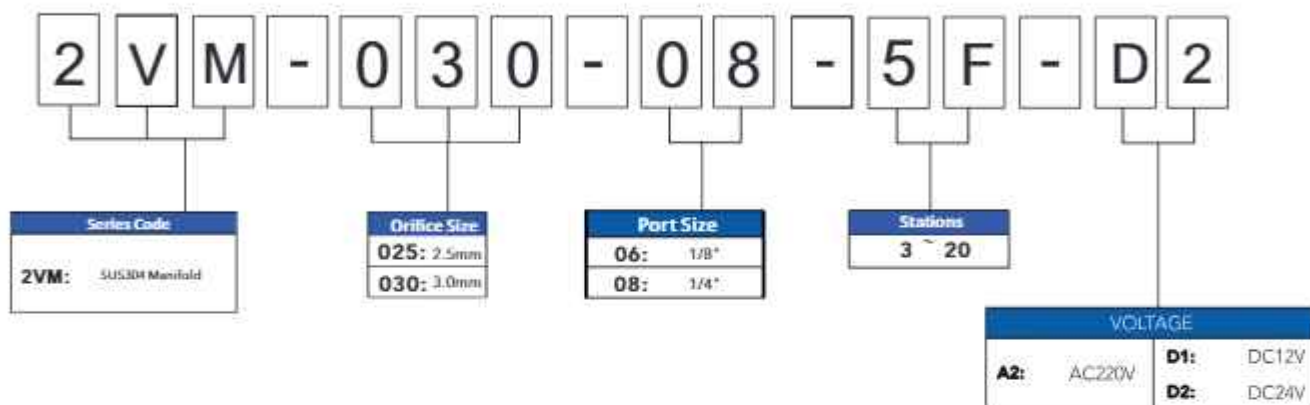

Ordering Example:

2WM series 2/2 ways manifold , 2.5 Orifice Size, 1/4"G port size, 7 stations, DC24V  
 SENYA part# 2VM-025-08-7F-D2

### Product Dimension:

